


Top-Running Single Girder Crane

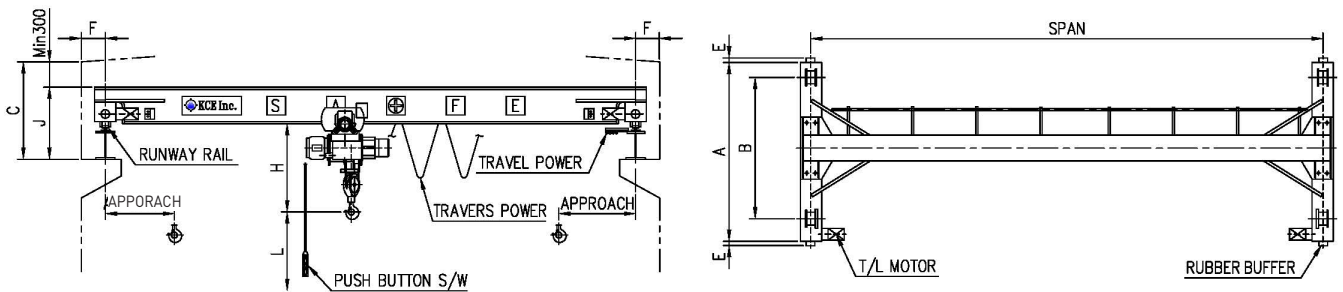

04

Capacity (ton)	Span (m)	Lift L (mm)	Speed(m/min) / Motor(kW)			Dimension (mm)							Travelling Wheel (mm φ)	Runway Rail (kg/m)																
			Hoisting	Traversing	Travelling	H	A	B	C	E	F	J																		
0.5	9	6 or 12	12/1.2 or 6/0.6	24/0.4 or 16/0.2	24/0.75x2 or 16/0.5x2	705	1940	1500	1100	60	250	J	160	15																
	12						2440	2000																						
	15						2940	2500																						
	18						3440	3000																						
	21						3940	3500																						
24	4440		4000																											
1	9		6 or 12			12/2.4 or 6/1.2	24/0.4 or 16/0.2	24/0.75x2 or 16/0.5x2	815						1940	1500	1100	60	250	J	160	15								
	12														2440	2000														
	15														2940	2500														
	18														3440	3000														
	21	3940		3500																										
24	4440	4000																												
2	9	6 or 12		10/3.7 or 5/1.8	24/0.4 or 16/0.2	24/0.75x2 or 16/0.5x2			980	1940	1500	1200	60	250	J	160	15													
	12									2440	2000																			
	15									2940	2500																			
	18									3440	3000																			
	21		3940				3500																							
3	9		6 or 12	9/5.5 or 4.5/2.8			24/0.4 or 16/0.2	24/0.75x2 or 16/0.5x2	1115	1940	1500	1200						60	250	J	160	15								
	12									2440	2000																			
	15									2940	2500																			
	18									3500	3000																			
	21									3500	3000																			
5	9	6 or 12		5.6/5.5 or 4.2/4.2	24/0.4 or 16/0.2	24/0.75x2 or 16/0.5x2			1325	2000	1500	1200	60	250	J	160	15													
	12									2500	2000																			
	15									3000	2500																			
10	9			6 or 12					4.5/9 or 3/6	24/0.4 or 16/0.2	24/0.75x2 or 16/0.5x2	1565											2050	1500	1200	60	250	J	160	15
	12																						2550	2000						
	15		3050				2500																							