
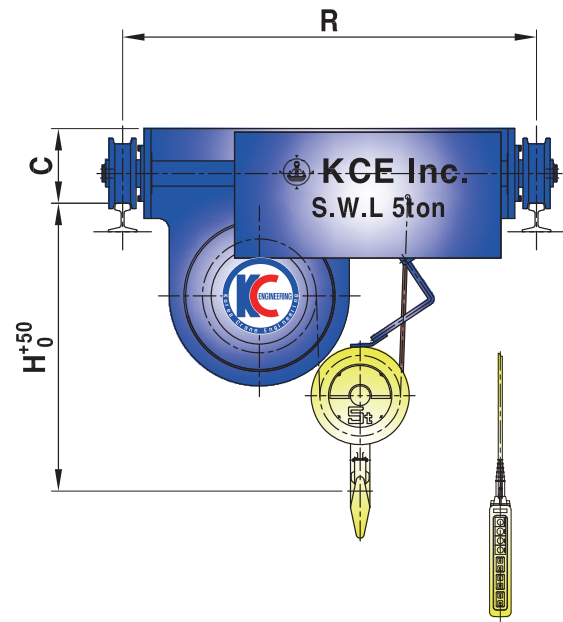


# Double Low Head Type Hoist

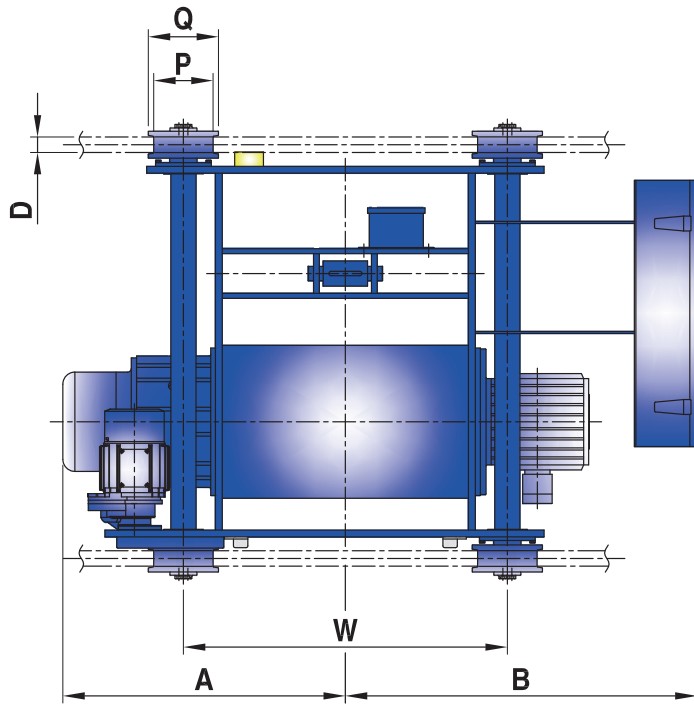

Capacity (ton)		2	3	5	7.5	10	15	
Model No.		DL02-N-H06	DL03-N-H06	DL05-N-H06	DL075-N-H12	DL10-N-H12	DL15-N-H12	
Hoisting	Lift Height (m)	6	6	6	12	12	12	
	Speed (m/min)	High 50/60 (Hz)	8.4/10	7.5/9	4.7/5.6	3.1/3.8	3.7/4.5	3.7/4.5
		Low 50/60 (Hz)	4.2/5	3.7/4.5	3.5/4.2	2.3/2.8	2.5/3	2.5/3
	Motor (kWxP)	High	3.7x4	5.5x4	5.5x6	5.5x6	9x8	13x8
		Low	1.8x8	2.8x8	4.2x8	4.2x8	6x12	8.5x12
	Wire Rope [ $\Phi$ xFalls]	Construction	6x37	6x37	6x37	6x37	6x37	6x37
Dia.(mm) x No. of ropes		8x4	9x4	11.2x4	14x4	16x4	20x4	
Brake		DC Magnet Disc Brake						
Traversing	Speed (m/min)	High 50/60 (Hz)	20/24	20/24	20/24	12.5/15	12.5/15	12.5/15
		Low 50/60 (Hz)	13/16	13/16	13/16	8.3/10	8.3/10	8.3/10
	Motor (kWxP)	High	0.75x4	0.75x4	0.75x4	0.75x4	0.75x4	1.5x4
		Low	0.5x6	0.5x6	0.5x6	0.5x6	0.5x6	1x6
Dimension (approx.) (mm)	H	400	495	525	950	920	1250	
	R	950	950	1150	1400	1300	1700	
	A	582	652	730	925	978	965	
	B	532	550	620	870	955	1009	
	C	200	170	200	200	240	260	
	W	750	650	772	1250	1250	1300	
	D	47	47	58	58	58	58	
	P	140	140	165	165	165	180	
	Q	170	170	195	195	195	210	
Weight (approx.) (kg)		410	500	800	850	1250	1850	
Rail		15kg/m	15kg/m	15kg/m	15kg/m	15kg/m	22kg/m	

- All materials applied are suitable in specified ambient temperature.
- KCE Inc reserves the right to alter or amend the above information without notice.
- The size can be changed according to detailed design.