


Foot Mounted Type Hoist

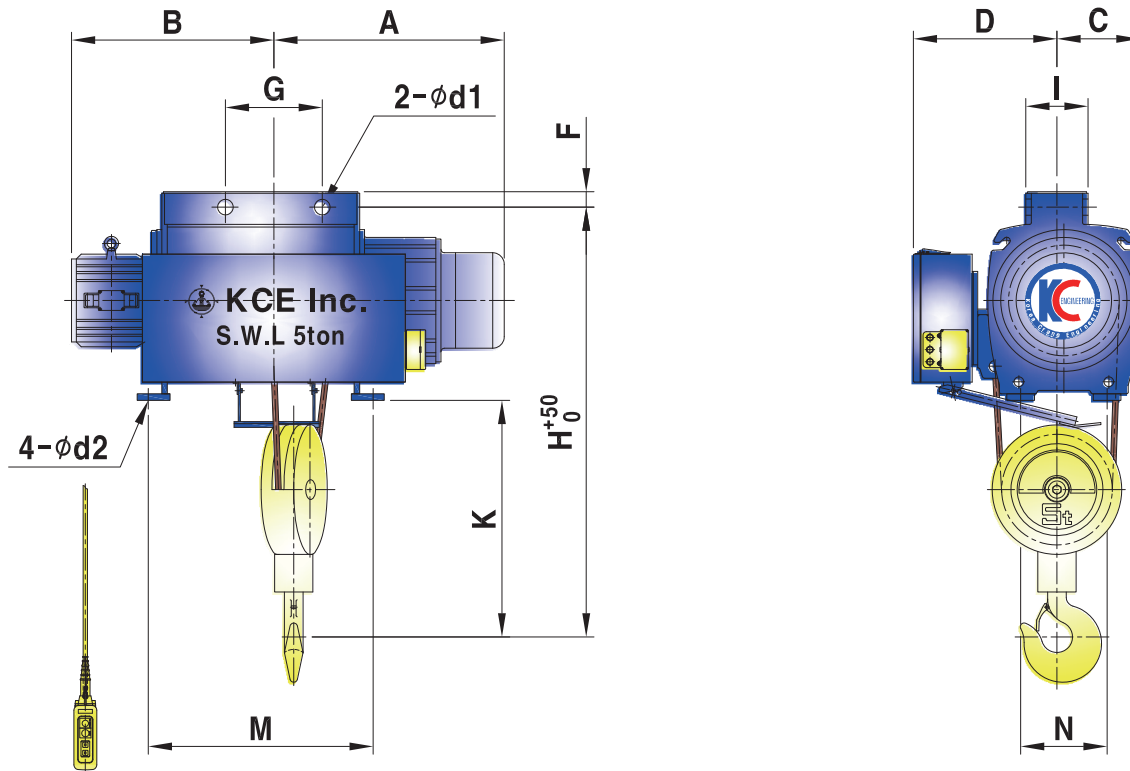

Capacity (ton)		1	2	3	5	7.5	10	15	20	
Model No.		NF01-N-H06	NF02-N-H06	NF03-N-H06	NF05-N-H06	NF075-N-H12	NF10-N-H12	NF15-N-H12	NF20-N-H12	
Hoisting	Lift Height (m)	6 (12)	6 (12)	6 (12)	6 (12)	12	12	12	12	
	Speed (m/min)	High 50/60 (Hz)	10/12	8.4/10	7.5/9	4.7/5.6	3.1/3.8	3.7/4.5	3.7/4.5	3.5/4.2
		Low 50/60 (Hz)	5/6	4.2/5	3.7/4.5	3.5/4.2	2.3/2.8	2.5/3	2.5/3	2.3/2.8
	Motor (kWxP)	High	2.4x4	3.7x4	5.5x4	5.5x6	5.5x6	9x8	13x8	17x8
		Low	1.2x8	1.8x8	2.8x8	4.2x8	4.2x8	6x12	8.5x12	11.5x12
Wire Rope [ΦxFalls]	Construction	6x37	6x37	6x37	6x37	6x37	6x37	6x37	6x37	
	Dia.(mm) x No. of ropes	8x2	10x2	12.5x2	16x2	14x4	16x4	20x4	22.4x4	
Brake		DC Magnet Disc Brake								
Dimension (approx.) (mm)	H	750	920	1060	1245	1270	1330	1660	1900	
	A	405 (505)	465 (565)	520 (620)	605 (705)	925	975	1075	1165	
	B	380 (480)	410 (510)	440 (540)	500 (585)	835	955	1005	1220	
	C	170	205	210	250	300	330	370	400	
	D	275	310	365	415	480	510	620	640	
	F	28	34	30	45	50	50	65	65	
	G	160	200	200	280	800	800	800	850	
	I	112	150	150	180	232	232	272	272	
	K	360	470	560	690	720	740	965	1150	
	M	350 (550)	350 (550)	364 (564)	450 (650)	1100	1100	1150	1250	
	N	150	200	200	250	400	400	500	500	
	d1	26	33	33	47	47	47	63	63	
d2	17	17	17	17	25	25	25	25		
Weight (approx.) (kg)		160 (170)	204 (240)	300 (350)	460 (525)	700	1000	1500	1900	

- All materials applied are suitable in specified ambient temperature.
- KCE Inc reserves the right to alter or amend the above information without notice.
- The size can be changed according to detailed design.